


# Product Brief

©INC-DOC-001281-01

Type:

## LA2UL V2

Public Address Loudspeaker  
for Indoor and Outdoor

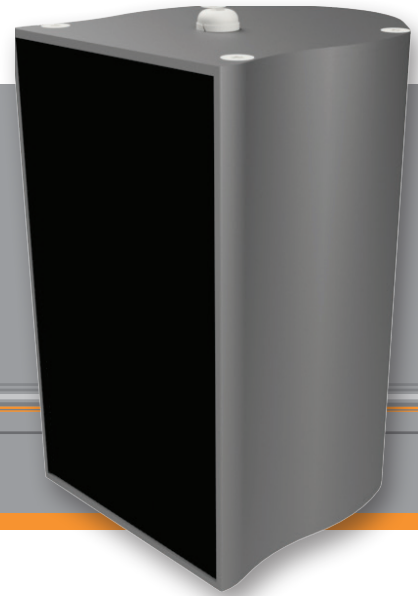

### Order number:

## INC-ASY-000485

Small weather resistant heavy duty loudspeaker for public address entertainment and announcements. Fitted with two drivers optimized for background music and speech, with priority for voice reproduction to ensure optimum level of speech intelligibility. Fitted with a 3 tab 100V transformer for flexible adjustment of the radiated power to balance with the rest of the PA system. Flexible options for mounting.

### Typical applications

Outdoor sound reinforcement systems.  
Alarm systems.

### Attributes

- All aluminium enclosure
- Flexible mounting
- Functional at low temperatures according to EN60068-2-1. Sealed to IP65
- Powder coated
- Customized mounting brackets
- Options can be delivered with custom cabling, paint, and brackets

### Specification

Specification	
Rated power	10 W
Transformer matching	10W, 6W, 3W
Sound Pressure Level (1W/1m)	92 dB
Max Sound Pressure Level (Rated Power/1m)	101 dB
Frequency Response (-10dB)	150 - 19.000 Hz
Vertical Polar response (-6dB, 2/4 kHz)	60/36
Temperature Range	-50 +70 °C
IP rating IP65 (3 party testing)	IP 65
Size	196 x 127 x 115 mm
Netweight	2,8 kg
Certificates:	IP 65 : EN 60068-2-1



**innotron**  
OF SCANDINAVIA




# Product Brief

Type: LA2UL V2




INC-DOC-001281-01


## Sketch with measurement:

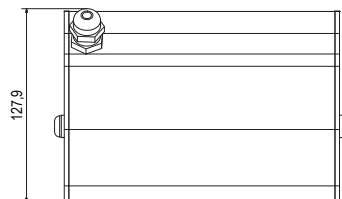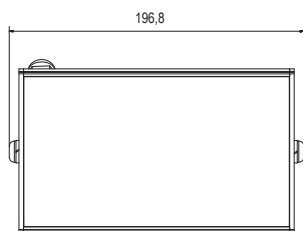


## Sketch of Wall Bracket (Selected optional accessories):




INC-SASY-000190




INC-SASY-000200

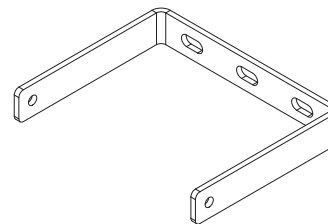

INC-PART-000398

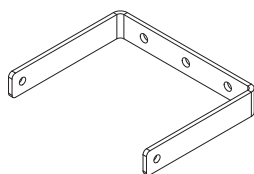

INC-PART-000363

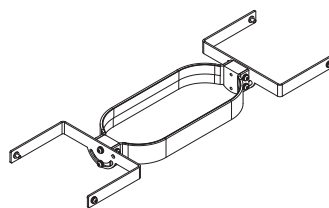

INC-ASY-000186